


Flow-to-Wire In-Conduit Hydropower Turbine



Model: 6TR4 – 1200 rpm
Output Range: 10 to 80kW

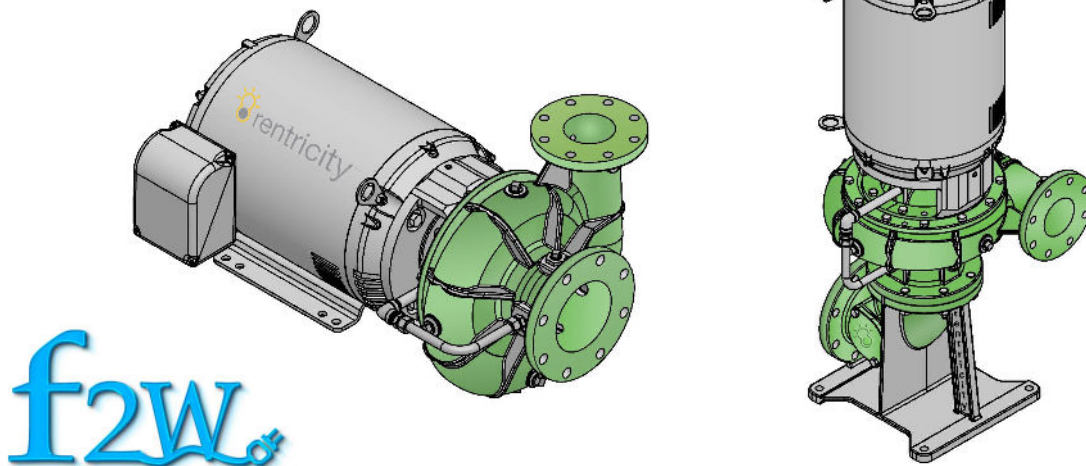

Standard Integrated Configuration	
Turbine	Ductile Iron/Close Coupled
Seal	Mechanical Shaft Seal
Generator	Standard Open Drip Proof (ODP) 480 volt - 3 phase

Optional Features

Safe Water/Low Lead NSF 61/372 Certification

Horizontal (frame mount) or Vertical (support stand) Configuration

Stainless Steel

Total Enclosed Fan-Cooled Generator (TEFC)

Fresh Water/Finished Consumable Water

Single phase, 600 volt 3 phase generators

1200 and 1800 RPM generators

Speed Sensing (Tachometer)

Contact: info@reentricity.com

www.reentricity.com

(732) 319-4501